



## MS-LP-6-F4

Matsing introduces Lens Technology Enabled™ Multi-Beam Antenna perfect for up to 6 sectors CRAN, Outdoor DAS and Small Cell deployment. This antenna is capable of 4X4 MIMO with a coverage footprint of 360°. Each beam has four full-band ports to support

3.3GHz – 4.2GHz. Factory installed tilt settings are available for 0° & 30°.



### Model Numbers:-


0° Light Pole Antenna Model # MS-LP-6-F4

30° Light Pole Antenna Model # MS-LP-6-F4-30°




### PATTERN RESULTS:

**Horizontal Pattern (3.5GHz)**

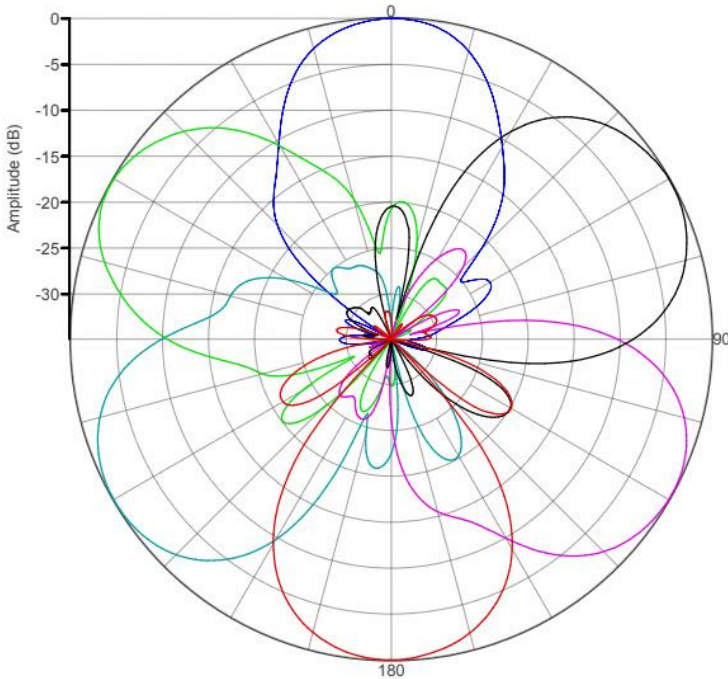

**Vertical pattern at 0° tilt and 30° tilt (3.5GHz)**

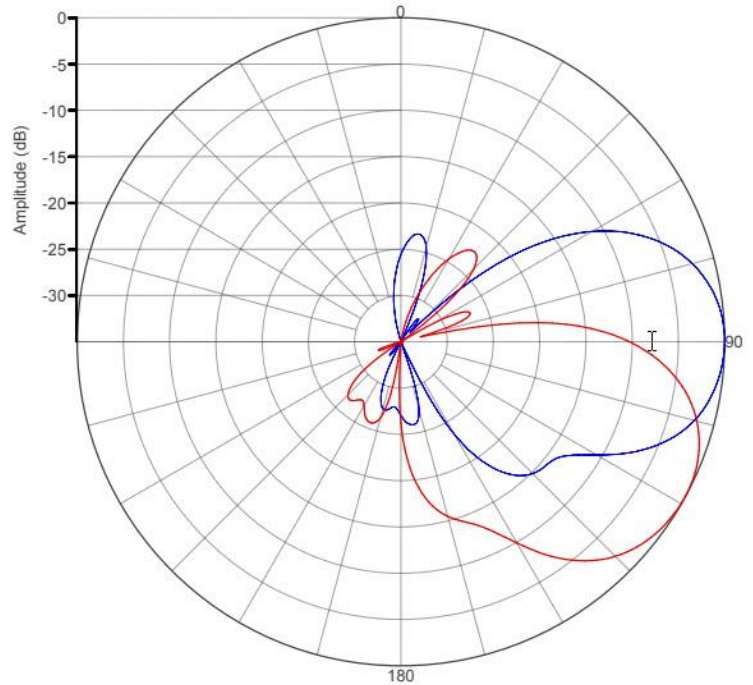



TECHNICAL SPECIFICATIONS	
Frequency	3300 MHz – 4200 MHz
Gain	14dBi
VSWR	<1.5:1
Polarization	Dual Slant ±45
Horizontal Coverage	360°
Horizontal Beamwidth (10dB)	60°
Horizontal Beamwidth (3dB)	34°
Vertical Beamwidth (3dB)	34°
Beam Cross-over	10dB typical
Total Number of Beams	6
Number of Ports per Beam	4
Number of Ports Total	24
Tilt Per Cross-Pol	0°, 30°
First Sidelobe Level	<-15dB
Front to Back Ratio	>28dB
Isolation Port to Port -Polarization	>28dB
Isolation Port to Port – Beam	>28dB
Power Rating	100W per port
Intermodulation	<-153dBc
Impedance	50 ohm
Connector Quantity and Type	24 x 4.3-10 female

MECHANICAL DATA	
Dimensions (H x W x D)	Cylindrical Design
	Diameter: 46cm / 18 inches
	Total Height: 41cm / 16 inches
Antenna Weight	7 kg 16 lbs
Radome Material	FiberGlass
Mounting	1 position pipe holder, bottom or side mountable.  Compatible pipe diameter: 6.1 – 11.4 cm 2.4 – 4.5 inch
ENVIRONMENTAL RATINGS	
Humidity	95% RH @ +30°C
Temperature	-40°C to +70°C
Wind load @ 150km/h	116 N/26lbf

### Connector Layout

